








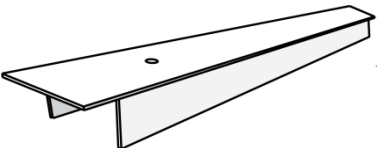


DKS ACCESSORIES

ILLUSTRATION	ITEM #	DESCRIPTION
FILLER PLATES		
	LFF	161 Cylindrical Lock Edge Filler Machined C.S. Holes Use: For Doors Dimensions: 1 1/8" x 2 1/4" Thickness: 11 Ga.
	DBFIL-5	Deadlock Edge Filler Machined C.S. Holes Use: For Frames Dimensions: 1 1/8" x 2 1/4" Thickness: 10 Ga.
	SF	Strike Filler Use: For Frames Dimensions: 1 1/4" x 4 3/8" 1 5/8" at Lip Thickness: 11 Ga.
	ASA-FP	ASA Blank Filler Plate Use: For Frames Dimensions: 1 1/4" x 4 3/8"
	MLF86-1	86 Mortise Lock Edge Filler Machined C.S. Holes Use: For Doors Dimensions: 1 1/4" x 8" Thickness: 16 Ga.
	HB-FP	Hinge Blank Filler Plate Use: For Doors 4 1/2" hinges
	HFPLT	Hinge Filler Plate Use: For Doors and Frames 4 1/2" hinges
	161CP	Cylindrical Lock Cover Plate Used for covering 2 1/8" diameter 161 hole
	CLFC-78	Cylindrical Lock Face Cover Thickness: 18 Ga.
	T-CAP-36 T-CAP-120	Screw-In Steel Top Cap Dimensions: 1 3/4"W x 1 1/2"H x 35 3/4"L Thickness: 20 Ga. Dimensions: 1 3/4"W x 1 1/2"H x 120"L Can be cut to desired length. Specify length on order. Any fraction of a foot is considered a foot.