


DKS Door Specifications

Series	Type	Gauge	Core	CR/GALV	Edge	Handing	Thickness	Label	Max Size
1000	Flush	16, 18, 20	Polystyrene	CR/GALV	Corner Seam	Reversible	1 3/4"	3hr/PP/S	8'0 x 8'0
1100	Flush	16, 18, 20	Polystyrene or Honeycomb	CR/GALV	Lock Seam	Reversible or Handed	1 3/4"	3hr/PP/S	8'0 x 8'0
1200	Flush	20	Polystyrene	CR/GALV	Seamless	Reversible	1 3/4"	3hr/PP/S	8'0 x 8'0
1300	Stiffened	18	Mineral Wool Fill	GALV	Seamless	Handed	1 3/4"	3hr/PP/S	8'0 x 8'0
1400	Stiffened	16	Mineral Wool Fill	GALV	Seamless	Handed	1 3/4"	3hr/PP/S	8'0 x 8'0
MD1400	Max Duty	14	Polystyrene	GALV	Seamless	Reversible	1 3/4"	90 mins	4'0 x 8'0
WS1400	Wind Storm	14	SS	GALV	Seamless	Reversible	1 3/4"	90 mins	6'0 x 8'0
1500	Retrofit Replacement	18	Polystyrene	CR	Corner Seam	Reversible	1 3/4"	N/A	
1600	Flush	16	Polystyrene	GALV	Seamless	Reversible	1 3/4"	3hr/PP/S	8'0 x 8'0
1700	6-Panel	18, 20	Polystyrene	CR/GALV	Seamless	Reversible	1 3/4"	3hr/PP/S	8'0 x 8'0
1800	Flush	18	Polystyrene	CR/GALV	Seamless	Reversible	1 3/4"	3hr/PP/S	8'0 x 8'0
1900	2-Panel	18	Polystyrene	CR/GALV	Seamless	Reversible	1 3/4"	3hr/PP/S	6'0 x 7'0
2000	Flush	18	Honeycomb	CR/GALV	Seamless	Reversible	1 3/4"	3hr/PP/S	8'0 x 8'0
6000	Flush	18	Double Egress Honeycomb	CR/GALV	Seamless	Reversible	1 3/4"	3hr/PP/S	8'0 x 8'0
9000	Temp. Rise 250 Degrees	18	Mineral core	CR/GALV	Seamless	Reversible	1 3/4"	90 mins	8'0 x 8'0

CR: Cold Rolled, PP: Positive Pressure, GALV: Galvanized, S: Smoke

Standard Door Types

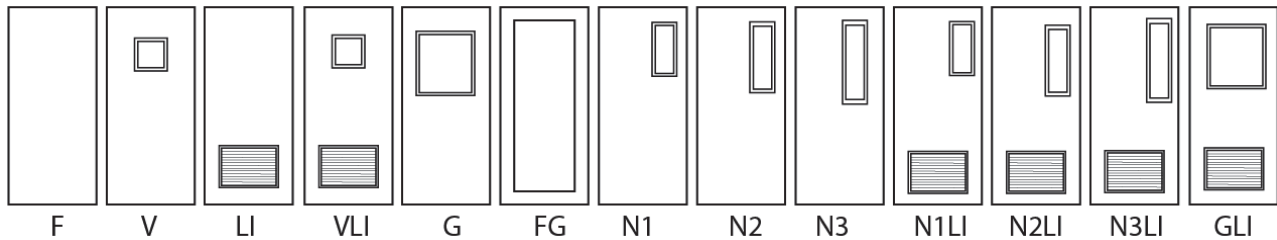

DOORS

FRAMES

Standard Hardware Locations 4-1/2" Hinge

