

16 GAUGE

UNEQUAL RABBETT

| TYPE | DEPTH | | | |
|--|-------------|-------------|-------------|-------------|
| Hinge Jamb 10'0" 6'8" & 7'0" location | 4.75"-5.75" | 6.25"-6.75" | 7.25"-7.75" | 8.25"-8.75" |
| Strike Jamb 10'0" | | | | |
| Hinge Mullion 10'0" 6'8" & 7'0" locations | | | | |
| Strike Mullion 10'0" | | | | |
| Blank Mullion 10'0" | | | | |

In stock depths: 5.625"(PA Warehouse only), 5.75", 6.75", 7.75", 8.25" and 8.75"
Contact DKS for lead time on non-stock items.

GS-22 Glass Stop 10'0", 5/8" x 5/8" w/ tek screws

DC-10 Door / Framing channel 10'0" length

How to order: Example:

➤ **Stick material**



| Stick Series | Cutout Location | Depth 5 3/4" | Hinge Jamb Right | or | Strike Jamb Left |
|--------------|-----------------|--------------|------------------|----|------------------|
| 75 | 68 | 575 | HJR | | SJL |

➤ **Mullion**

| Mullion Series | Cutout Location | Depth 8 3/4" | Mullion Hinge Left | or | Mullion Strike Left |
|----------------|-----------------|--------------|--------------------|----|---------------------|
| 75 | 68 | 575 | HJR | | SJL |

➤ **Blank Mullion**

| Blank Mullion Series | Depth 7 3/4" | Blank Mullion |
|----------------------|--------------|---------------|
| 75 | 775 | BM |

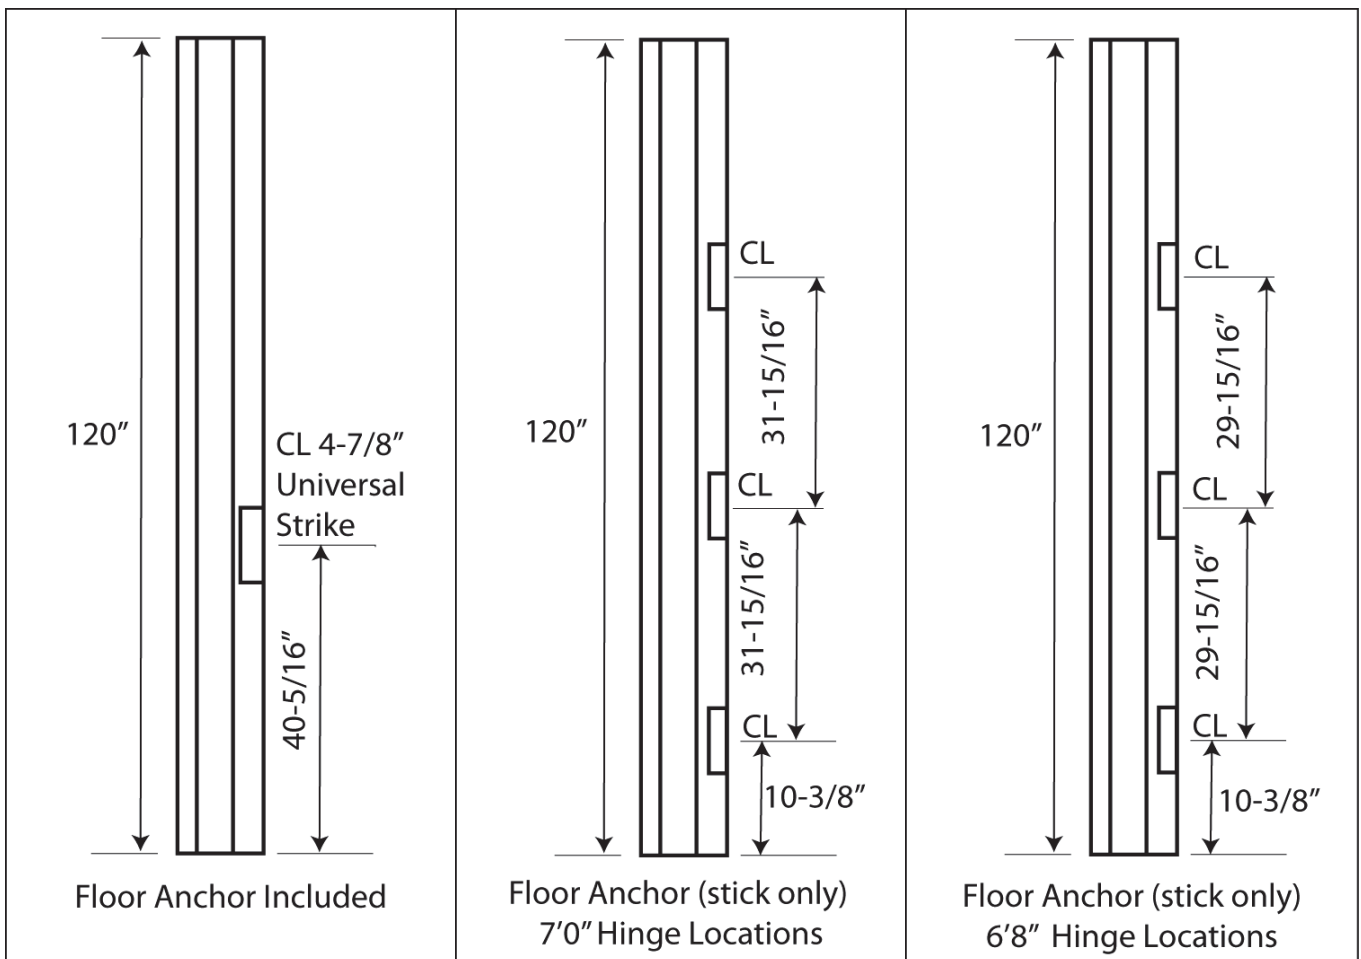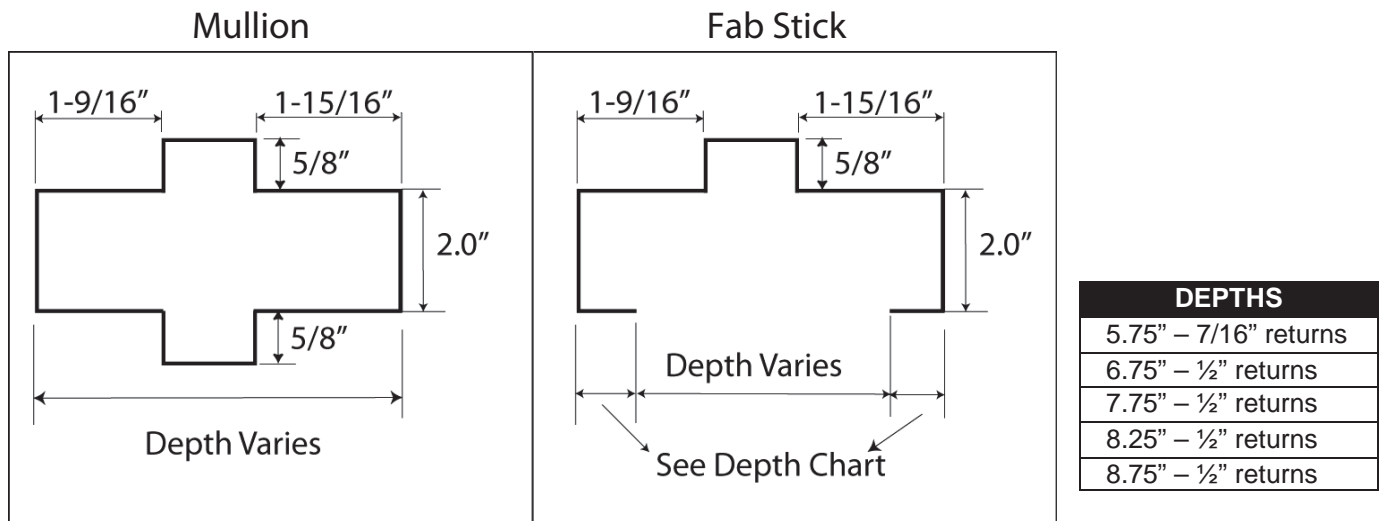

4.5" X 4.5" Hinge reinforcements
 Reinforcements 7 gauge
 Grey Prime
 Floor Anchor 18 gauge