

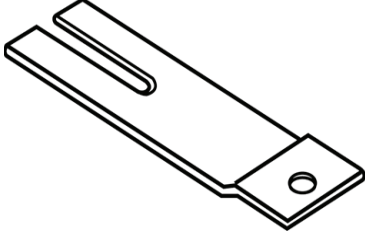

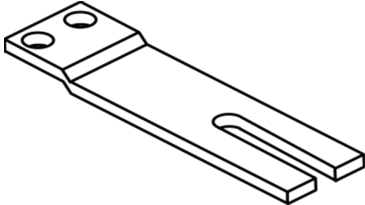
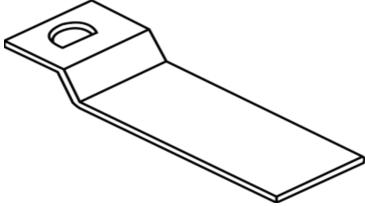
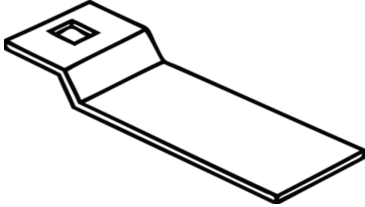


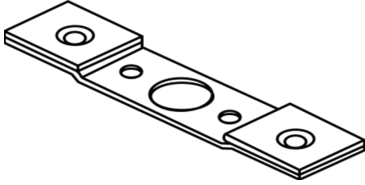

STEEL DOOR & FRAME SYSTEMS, INC.








DKS ACCESSORIES

ILLUSTRATION	ITEM#	DESCRIPTION	MASTER QTY
HARDWARE REINFORCEMENT			
	ASATAB-7	4 7/8" Strike Reinforcement, Split Tail Dimensions: 1" x 2 1/2" Tab 3/32" Offset 12-24 Tap Thickness: 11 Ga. Finish: USP	750
	EDG-9	Exit Device Guide Dimensions: 1 3/8" x 2" 2 Holes 8-32 Tap Thickness: 10 Ga. Finish: Mill Finish	200
	FBTAB-6	Flush Bolt Tabs, Split Tail Dimensions: 1" x 2 1/2" 3/32" Offset 8-32 Tap 1/2" C/L for 1" Body Thickness: 11 Ga. Finish: USP	750
	FBGID-4	Flush Bolt Guide 5/16" Offset 1/2" D-Hole For Door Top & Bottom Thickness: 12 Ga. Finish: USP	200
	FBGIS-3	Flush Bolt Guide 5/16" Offset 1/2" Square-Hole For Door Top & Bottom Thickness: 12 Ga. Finish: Mill Finish	200
	MLCYL-3	Conversion Assembly Mortise Lock to Cylindrical Lock Dimensions: 1 1/4" x 8" 3/8" Off Center Face Plate: 1 1/8" x 2 1/4" Thickness: 12 Ga. Finish: Dichromate Plating	100
	MLASA-4	Conversion Assembly Mortise Lock to 4 7/8" Strike Dimensions: 1 1/4" x 8" 3/8" Off Center Face Plate: 1 1/8" x 2 1/4" Thickness: 12 Ga. Finish: Dichromate Plating	100

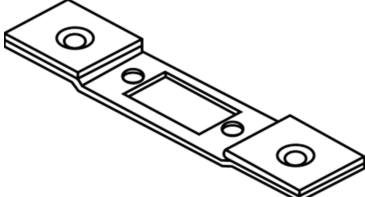

STEEL DOOR & FRAME SYSTEMS, INC.



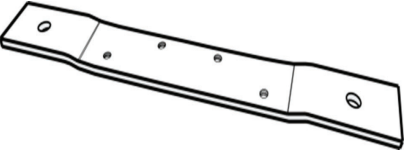

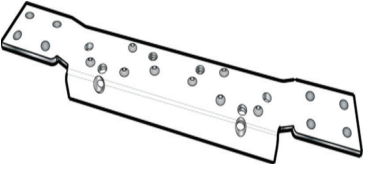
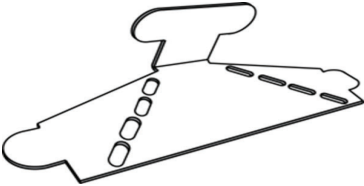
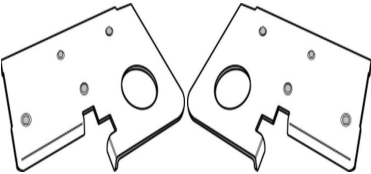
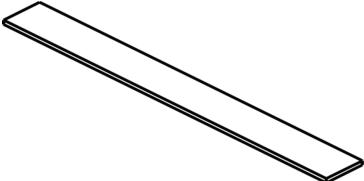
DKS ACCESSORIES

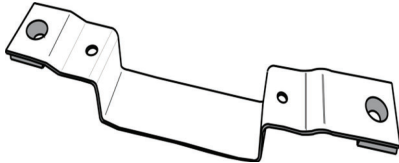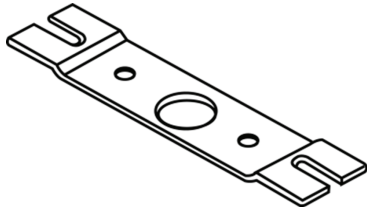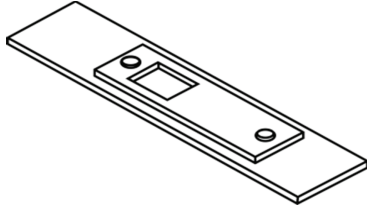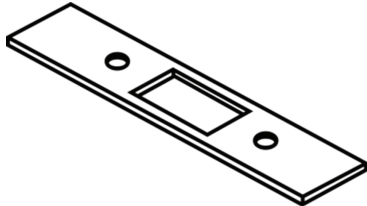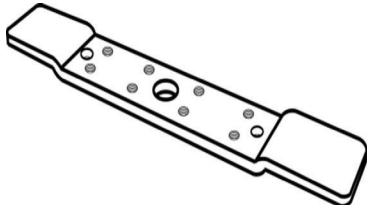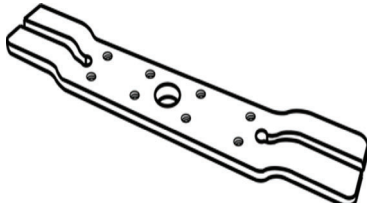ILLUSTRATION	ITEM#	DESCRIPTION	MASTER QTY
	CFP-34	86 to ASA Conversion Filler Plate Converts 86 edge to ASA strike Finish: Mill Finish	150
	DBCONV-2	Dead Lock Reinforcement Plate for 1 3/4" Doors Dimensions: 2 3/16" x 1 3/8" x 1 9/16" Thickness: 14 Ga. Finish: Mill Finish	100
	DBLAT-1	Cylindrical Lock – Dead Lock, Split Tail Dimensions: 1 1/4" x 4 1/2" 3/32" Offset 1" Hole 8-32 Tap Thickness: 12 Ga. Finish: USP	300
	FLUSHSTRK-2	Reversible Flush Bolt Strike with Backing Plate Dimensions: 1 1/8" x 3 3/4" 3/32" Offset 8-32 Tap Thickness: 16 Ga. Finish: Dichromate Plating	200
	TSTRK-2	2 3/4" Strike Reinforcement (for frame and door) Dimensions: 1" x 2 1/2" 7/8" x 1 1/4" Hole 8-32 Tap Thickness: 12 Ga. Finish: Dichromate Plating	200
	FRHR-1	4 1/2" Frame Hinge Reinforcement Use: 4 1/2" hinges Dimensions: 3/16" x 1 1/4" x 8" Thickness: 10 Ga.	250
	DHRF-825	4 1/2" Door Hinge Reinforcement, Split Tail Use: 4 1/2" hinges Dimensions: 3/16" x 1 1/4" x 8" Thickness: 10 Ga.	250



STEEL DOOR & FRAME SYSTEMS, INC.






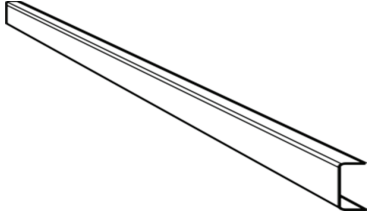
DKS ACCESSORIES

ILLUSTRATION	ITEM#	DESCRIPTION	MASTER QTY
	HSADJ-516	Slotted Screws for non-handed adjustment on hinge reinforcement Size: 12-24 thread Length: $\frac{5}{16}$ " Qty: 1 pc	1000
	HR-U	Universal Hinge Reinforcement for both doors and frames Use: 4 $\frac{1}{2}$ " hinges Dimensions: 1 $\frac{1}{4}$ " x 8 $\frac{3}{4}$ " Thickness: 10 Ga. Finish: Mill Finish	80
	HR-HD50	Heavy Duty Hinge Reinforcement Use: 5" hinges Dimensions: 1 $\frac{1}{4}$ " x 10" Thickness: 7 Ga. Finish: Mill Finish	25
	HR-HD45	Heavy Duty Hinge Reinforcement Use: 4 $\frac{1}{2}$ " hinges Dimensions: 1 $\frac{1}{4}$ " x 10" Thickness: 7 Ga. Finish: Mill Finish	200
	DHR-29	Convertible Hi-Frequency Door Hinge Reinforcement to be used for both doors and frames Use: 4 $\frac{1}{2}$ " hinges Dimensions: 1 $\frac{1}{4}$ " x 8 $\frac{3}{4}$ " Thickness: 10 Ga. Finish: Mill Finish	80
	CBRKT-26	Corner Bracket Frames Finish: Mill Finish	250
	C-BRCTL (Left) C-BRKTR (Right)	Handed Corner Bracket / Frame For LH or RH Finish: Mill Finish	200
	CRO1	Closer Reinforcement Dimensions: 1 $\frac{3}{4}$ " x 16" Thickness: 12 Ga. Finish: Mill Finish	50

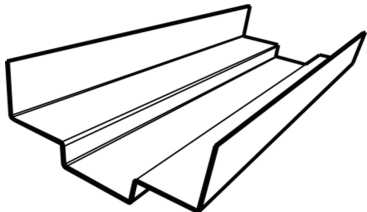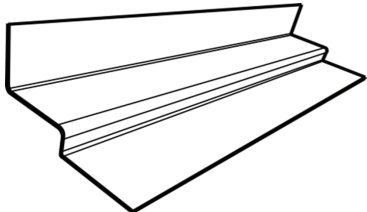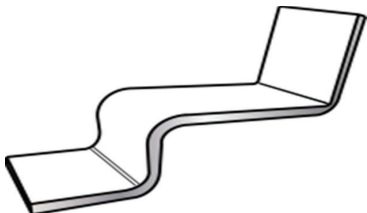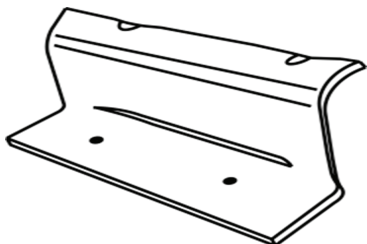

STEEL DOOR & FRAME SYSTEMS, INC.


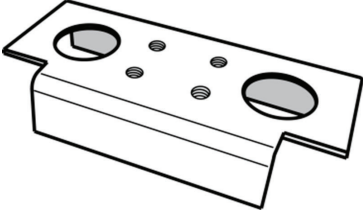
DKS ACCESSORIES

ILLUSTRATION	ITEM#	DESCRIPTION	MASTER QTY
	DC-10	C Channel Door / Framing channel for reinforcing steel doors in listed glass frame Sold in lengths of 10' and can be cut to size Dimensions: 1 3/4" x 3/4" x 3/4" x 10' Thickness: 0.053 in. (16 gauge)	10
	CRFP-30	Full Profile Closer Reinforcement 14" Long for 5 3/4" frame depth Finish: Mill Finish	20
	CRHP-31	Half Profile Closer Reinforcement for unequal rabbet 14" long Finish: Mill Finish	20
	RCLIP-32	Reinforcing Clip High frequency clip Finish: Mill Finish	100
	MCLIP-33	Mounting Clip for transom panel Finish: Mill Finish	200
	M-BRKT	Mullion Bracket Finish: Mill Finish	500

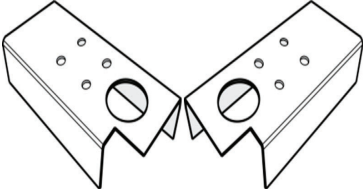

STEEL DOOR & FRAME SYSTEMS, INC.

DKS ACCESSORIES

ILLUSTRATION	ITEM#	DESCRIPTION	MASTER QTY
	FBDG-LR	Flush Bolt Door Guide (Reversible) 4 x 8-32 Thread Finish: USP	150
	FBDG-LH (Left) FBDG-RH (Right)	Handed Flush Bolt Door Guide 4 x 8-32 Thread Finish: Mill Finish (Left) USP (Right)	100