





**Standard Features**

- ◆ 16-Gauge A-40 Galvanized Steel
- ◆ 3-Piece System Designed to Adjust to Multiple Depth Wall Conditions
- ◆ Slide Rails along the frame throat enables the frame to accommodate 4.75" to 7.875" thick walls
- ◆ Three 7-Gauge 4.5" x 4.5" Hinge Reinforcements for 6'8" and 7'0" Doors
- ◆ Four 7-Gauge 4.5" x 4.5" Hinge Reinforcements for 8' Doors
- ◆ Hinge Reinforcement Accepts Standard or Heavy Weight Template Hinges
- ◆ 12-Gauge ASA Strike Reinforcement
- ◆ Frame is Prepared for Silencer Operation
- ◆ 90 Minute WHI Mark as Standard

**Typical Hardware Preparations**




4-1/2" x 4-1/2"  
1-3/4" FRAME HINGE PREP



4-7/8" UNIVERSAL STRIKE

**Sections**

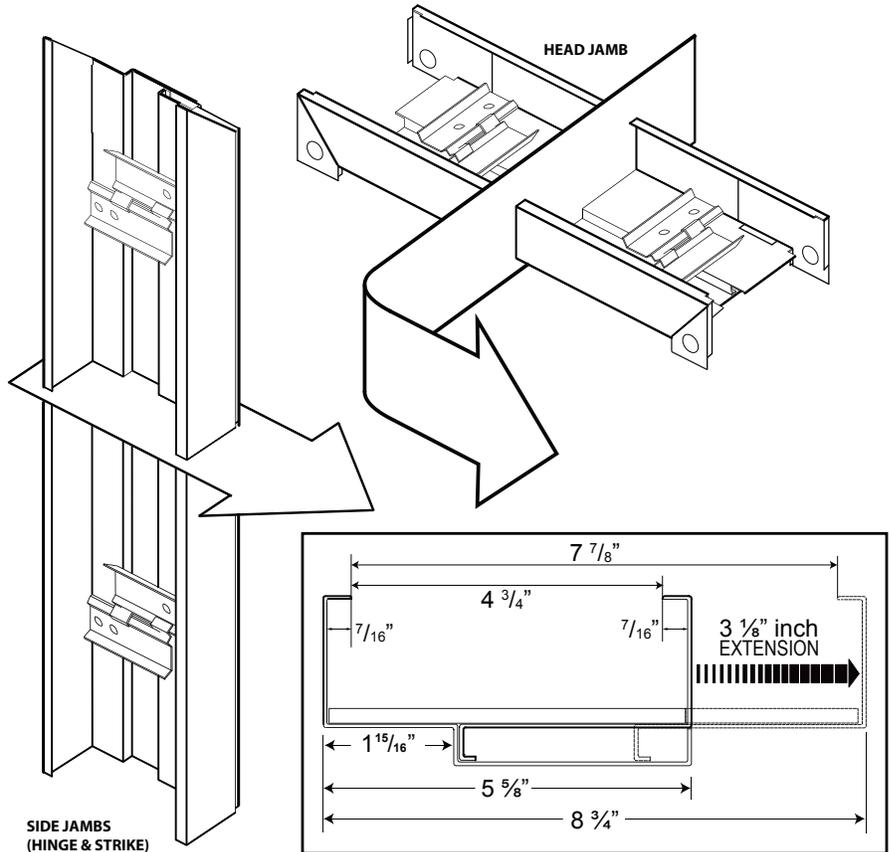

Warnock Hersey

